


# CASE ERECTORS

## CASE ERECTOR, BOTTOM SEALER



**2-EZ® SB**  
Sanitary Case Erector

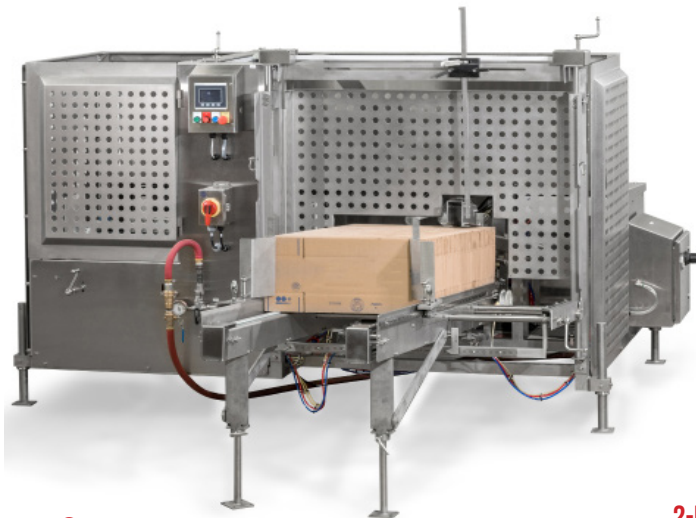

**2-EZ® HS CASE ERECTOR**  
Case Erector, Bottom Sealer

SPECIFICATIONS	CE-10	2-EZ® SB 15	2-EZ® HS 20	2-EZ® HS 25	2-EZ® HS 30	2-EZ® XL 10	2-EZ® XL 15	2-EZ® XXL 8	2-EZ® XXL 12
Max. Speed	10 CPM	15 CPM	20 CPM	25 CPM	30 CPM	10 CPM	15 CPM	8 CPM	12 CPM
Max. Case Range	17.5" x 13.5" x 17.5"	24" x 16" x 18"	24" x 16" x 18"	24" x 16" x 18"	20" x 13.5" x 18"	24" x 20" x 18"	24" x 20" x 18"	32" x 26" x 30"	32" x 26" x 30"
Min. Case Range	8" x 6" x 5" (8" OAH)	8" x 6" x 5"	8" x 6" x 5"	8" x 6" x 5"	8" x 6" x 5"	8" x 6" x 5"	8" x 6" x 5"	21" x 15" x 9"	21" x 15" x 9"
Magazine Capacity	38" -114 Cases	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases	50" ~150 Cases
Case Modification Available	N	Y (H & W Only)	Y	Y	Y	N	Y	N	Y
Washdown Option	N	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K
Glue Version	N	N	2-EZ HS 20G	2-EZ HS 25G	2-EZ HS 30G	N	2-EZ XL 15G	N	N
Opposite Case Hand Option	N	N	Y	Y	Y	N	Y	N	N
Std. Voltage	120V/1PH	120V/1PH	240V/3PH	240V/3PH	240V/3PH	120V/1PH	240V/3PH	120V/1PH	240V/3PH
SCFM - 80 PSI - 3/4 Supply Line	9 SCFM	21 SCFM	17 SCFM	6 SCFM	6 SCFM	18 SCFM	12 SCFM	9 SCFM	6 SCFM
Footprint	5'8" X 7'7" X 5'6"	8'10.5" x 9'7" x 6'7.375"	8'10.5" x 9'7" x 6'7.375"	8'10.5" x 9'7" x 6'7.375"	8'10.5" x 9'7" x 6'7.375"	8'10" x 10'7" x 6'7"	8'10" x 10'7" x 6'7"	11'5" x 11'1" x 8'9"	11'5" x 11'1" x 8'9"
Approx. Shipping Weight	~1800 lbs.	~2100 lbs.	~2100 lbs.	~2100 lbs.	~2100 lbs.	~2200 lbs.	~2200 lbs.	~2500 lbs.	~2500 lbs.
Std. Finish	Low Case & Low Tape	Steel Plus 316 is a two component, water base epoxy filled with 316 stainless steel flake. Finish color is a Steel-It Grey and USDA and FDA accepted.							
Controls	MICRO LOGIX & PB	AB COMPACT LOGIX PLC with PV+ Color TS							
Available Options		Low Case, Low Tape, Extended Magazine, Casters, Stack Lights, Elevation Kits, Spare Parts							